

VALVES

ANSI 150


FLOATING SPLIT BODY FORGED BALL VALVE FULL BORE

Rating: ANSI 150-600
PN 16-40

PN6, PN10, PN25 Available on request



Dimensions

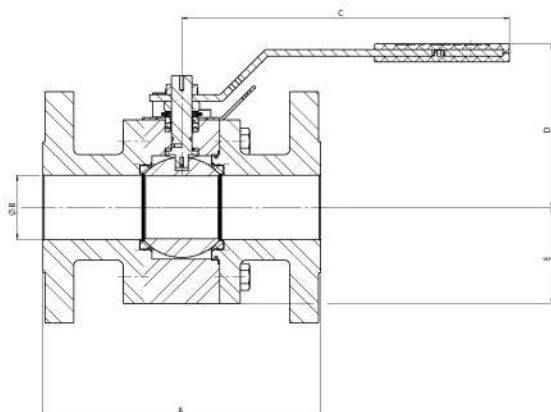


SIZE	1/2"	3/4"	1"	1 1/2"	2"	3"	4"	6"
A RF	108	117	127	165	178	203	229	394
A RTJ	---	---	140	178	191	216	241	406
A BW	108	117	165	190	216	283	305	457
B	ø13	ø19	ø25	ø38	ø49	ø74	ø100	ø150
C	138,5	138,5	171	260	260	333	427	472
D	85	89	97	119	127	158	174	227
E	45	50	55	70	75	102,5	115	165
WEIGHT KG.	2,7	3,6	4,5	9	14,3	25	34	91

Dimensions in mm

Top mounting & Torques ($\Delta p=0$)

SIZE	1/2"	3/4"	1"	1 1/2"	2"	3"	4"	6"
ISO 5211 Nm	F03 8	F03 11	F03 15	F05 33	F05 44	F07 100	F10 165	F12 230

Description & Materials

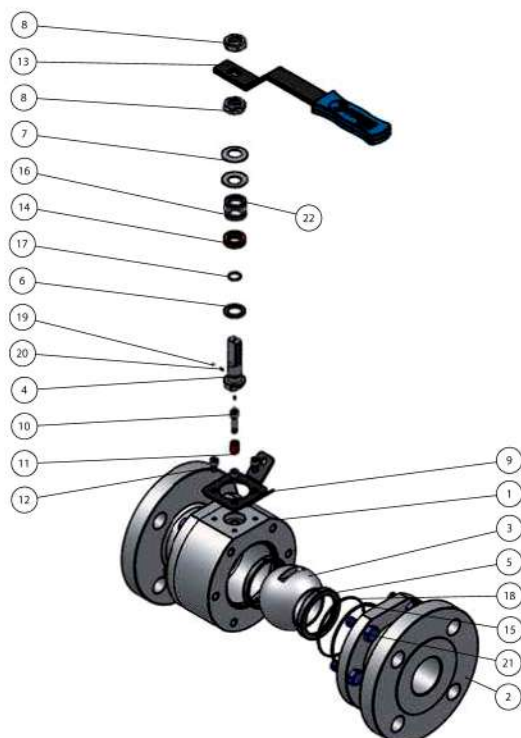

POS	DESCRIPTION	MATERIAL			SPARE PARTS (QTY) 
1	BODY	A105	304	316	ON REQUEST
2	CLOSURE	A105	304	316	
3	BALL	304	304	316	
4	STEM	304	304	316	
5	SEAT	PTFE	PTFE	PTFE	2
6	WASHER	PTFE	PTFE	PTFE	1
7	SPRING WASHER	C72	C72	C72	ON REQUEST
8	NUT	6S	6S	6S	ON REQUEST
9	LOCKING DEVICE	FE410	FE410	FE410	ON REQUEST
10	TE SCREW	8,8	8,8	8,8	
11	LEVER STOP	FE410	FE410	FE410	
12	TE SCREW	8,8	8,8	8,8	ON REQUEST
13	ANATOMIC LEVER	GALV. STEEL	GALV. STEEL	GALV. STEEL	
14	CHEVRON	RPTFE	RPTFE	RPTFE	1
15	GASKET	GRAPHITE	GRAPHITE	GRAPHITE	1
16	GASKET	GRAPHITE	GRAPHITE	GRAPHITE	1
17	O-RING	HNBR	HNBR	HNBR	1
18	O-RING	HNBR	HNBR	HNBR	1
19	ANTISTATIC BALL	304	304	316	
20	ANTISTATIC SPRING	304	304	316	
21	BOLT	8,8	8,8	8,8	
22	WASHER	PTFE	PTFE	PTFE	1