


Check Valve VENTURI PN25 - 40

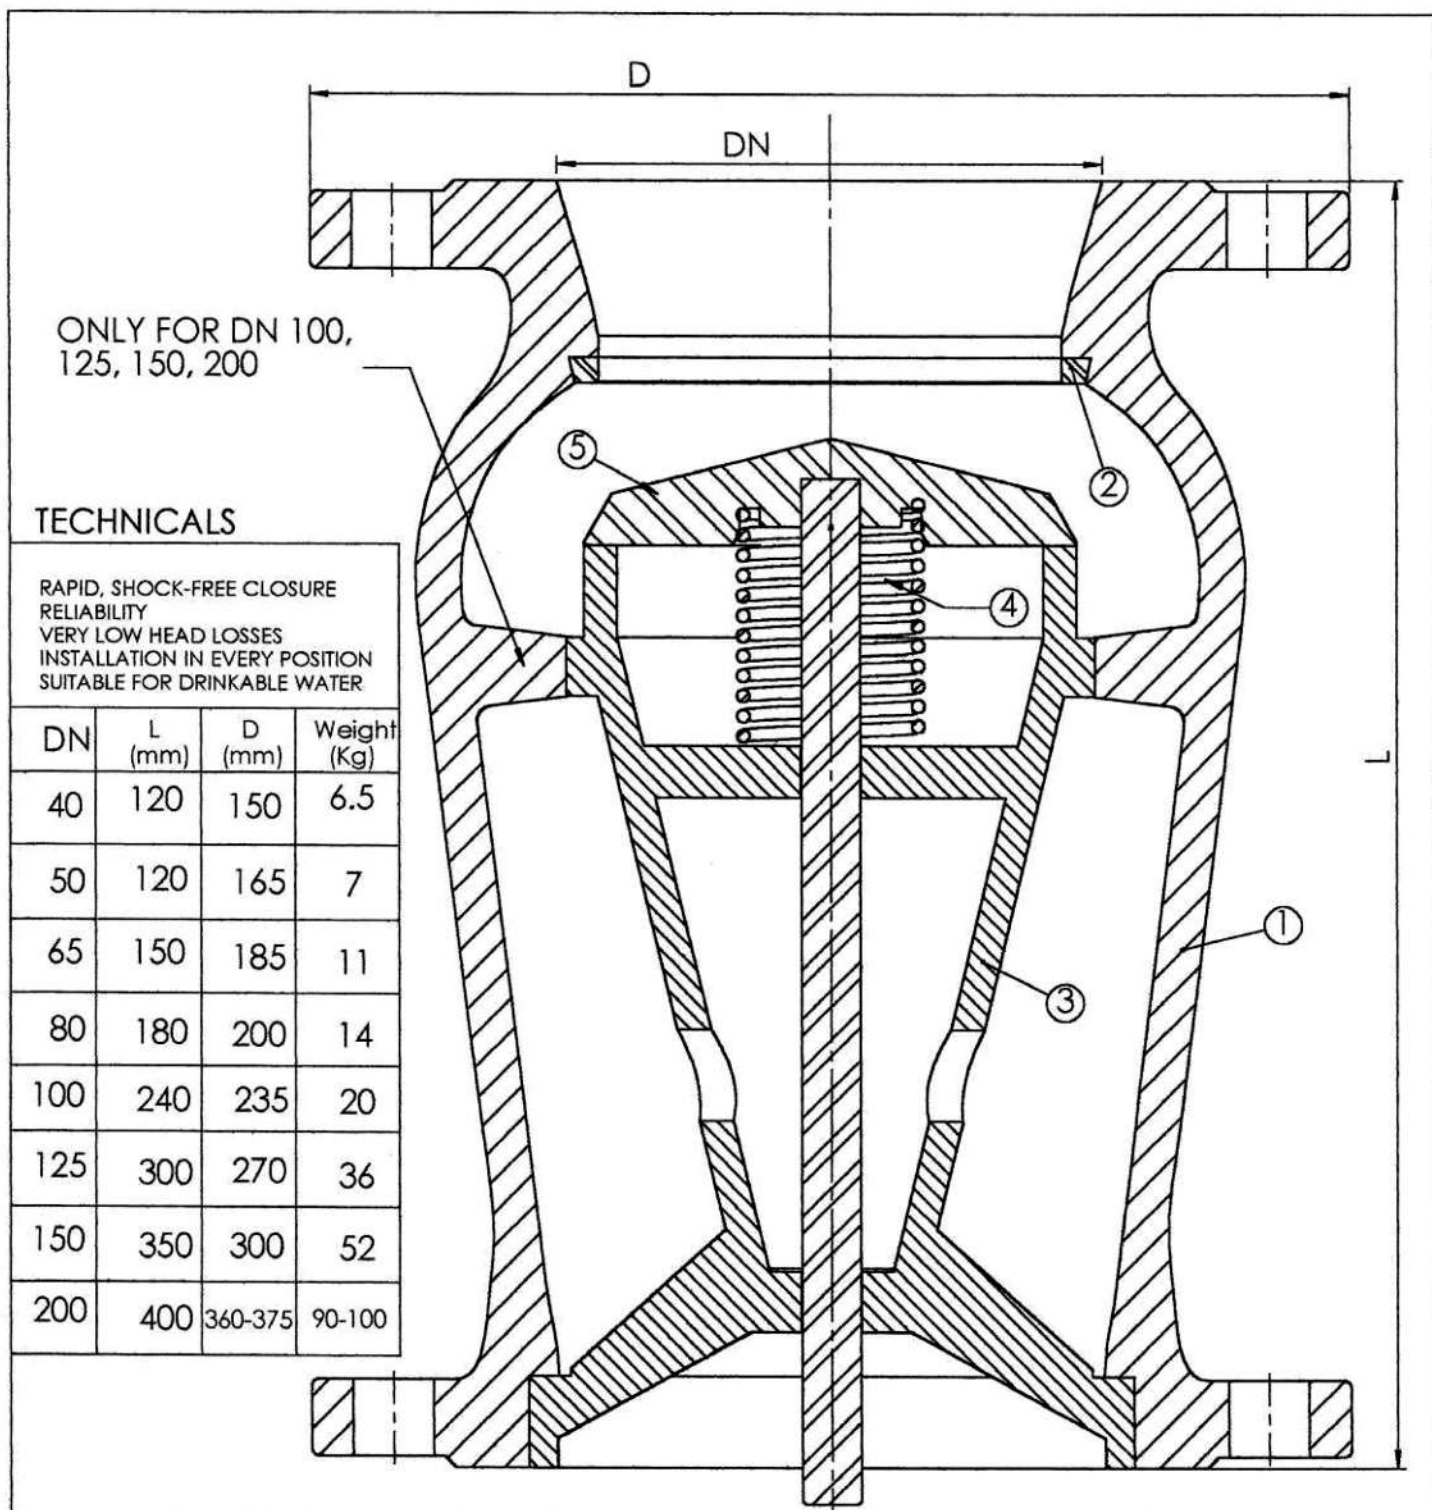

ONLY FOR DN 100,
125, 150, 200

TECHNICALS

RAPID, SHOCK-FREE CLOSURE
RELIABILITY
VERY LOW HEAD LOSSES
INSTALLATION IN EVERY POSITION
SUITABLE FOR DRINKABLE WATER

DN	L (mm)	D (mm)	Weight (Kg)
40	120	150	6.5
50	120	165	7
65	150	185	11
80	180	200	14
100	240	235	20
125	300	270	36
150	350	300	52
200	400	360-375	90-100

COMPONENT LIST

1. BODY (EN1563 EN-GJS-400 - DUCTILE IRON)
epoxy powder painted
2. RING (AISI304 - STAINLESS STEEL)
3. GUIDE (EN 1982 Cu Zn Pb 2 Ni 1 Al Fe-C - BRASS) for Dn 40-100;
(EN1563 EN-GJS-400 - DUCTILE IRON)
epoxy powder painted for Dn 125-200
4. SPRING (AISI302 - STAINLESS STEEL)
5. SHUTTER (AISI 304 - STAINLESS STEEL);
FOR Dn 200 PAINTED DUCTILE IRON DISC
WITH STAINLESS STEEL INSERT

CHECK VALVE
"VENTURI"
NP 25 - 40

SIZE	CODE	DIS. N.	REV.
	VRV	1001/25/40	00