


# Check Valve VENTURI PN10 - 16

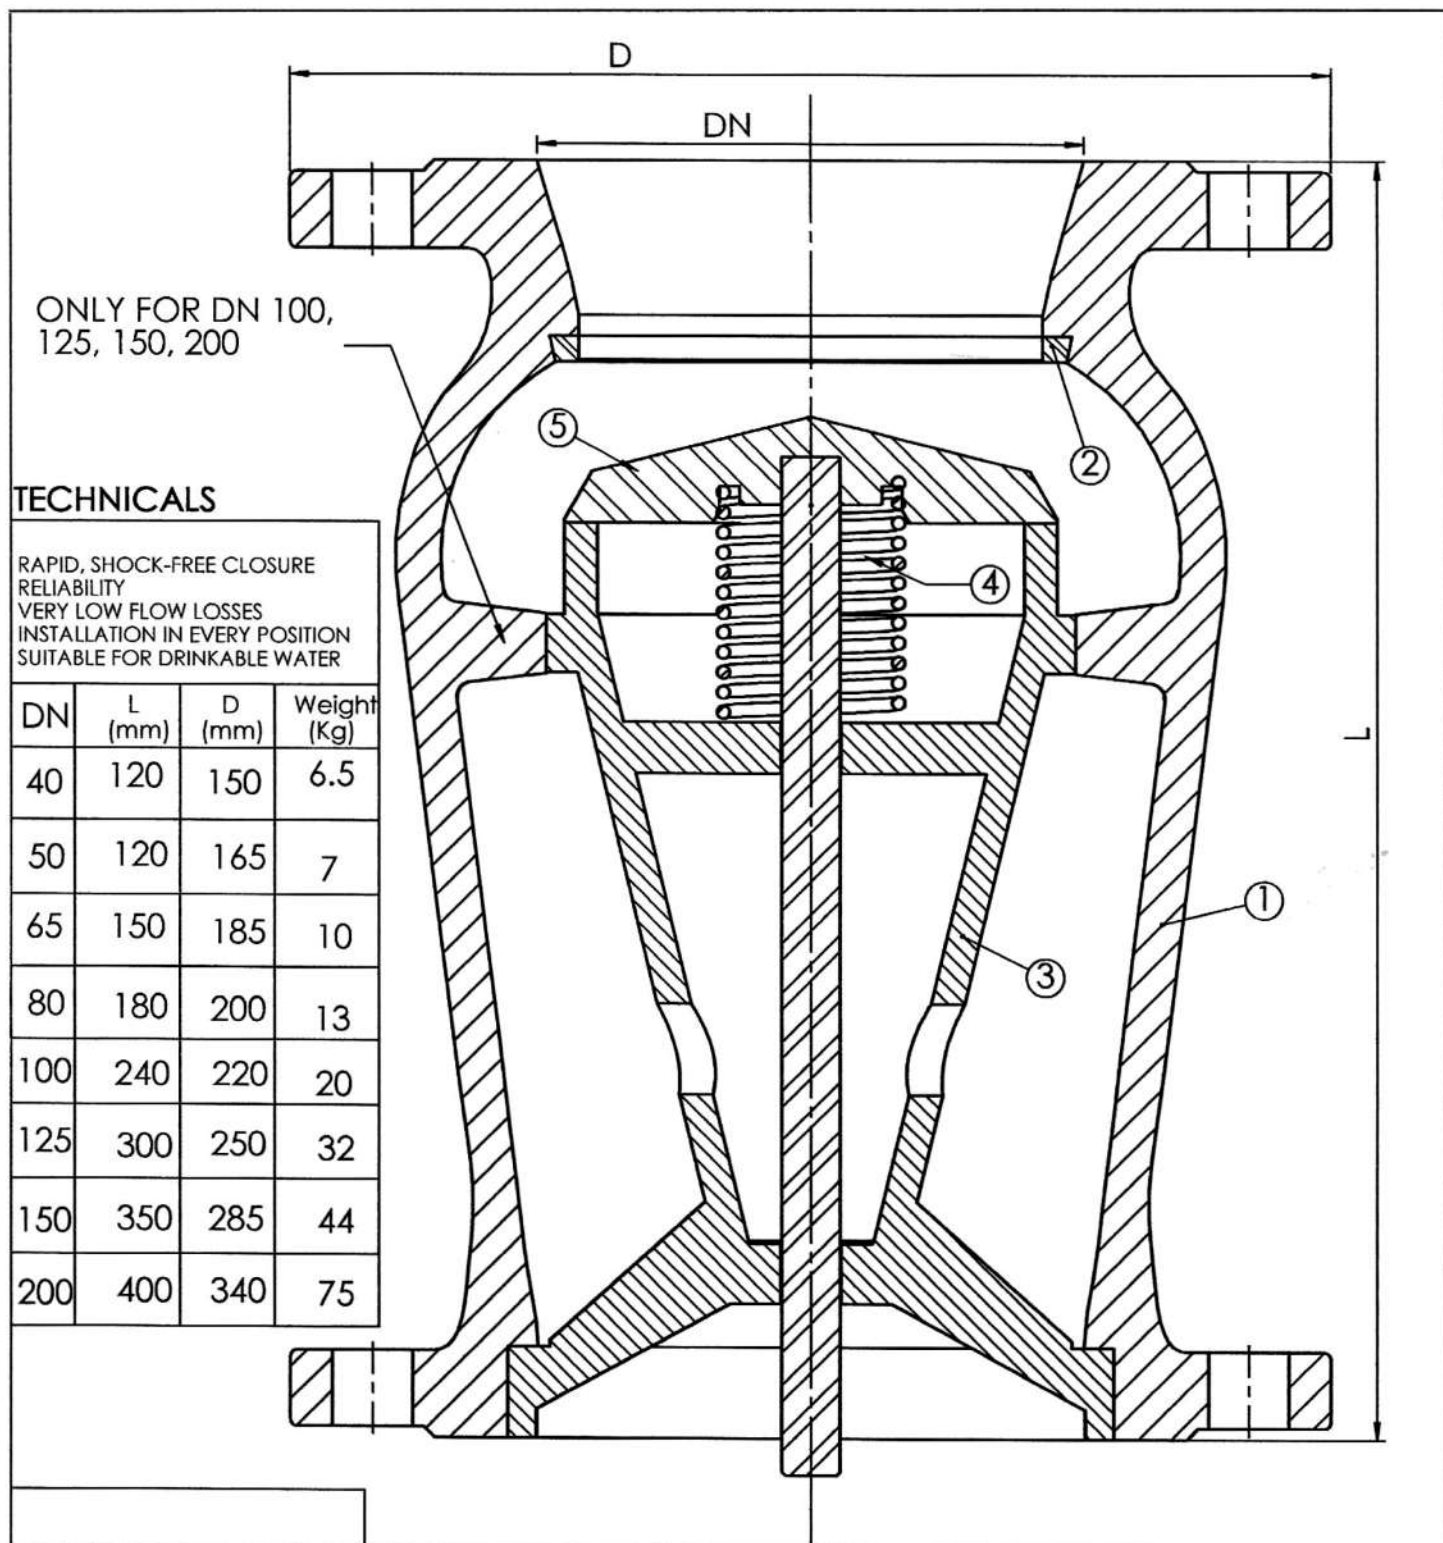

## TECHNICALS

RAPID, SHOCK-FREE CLOSURE  
RELIABILITY  
VERY LOW FLOW LOSSES  
INSTALLATION IN EVERY POSITION  
SUITABLE FOR DRINKABLE WATER

DN	L (mm)	D (mm)	Weight (Kg)
40	120	150	6.5
50	120	165	7
65	150	185	10
80	180	200	13
100	240	220	20
125	300	250	32
150	350	285	44
200	400	340	75

### COMPONENT LIST

- BODY (EN1561 EN-GJL-250 - CAST IRON)  
epoxy powder painted
- RING (AISI304 - STAINLESS STEEL)
- GUIDE (EN 1982 Cu Zn Pb 2 Ni 1 Al Fe-C - BRASS) for Dn 40-100;  
(EN1561 EN-GJL-250 - CAST IRON)  
epoxy powder painted for Dn 125-200
- SPRING (AISI302 - STAINLESS STEEL)
- SHUTTER (AISI 304 - STAINLESS STEEL);  
FOR Dn 200 PAINTED CAST IRON DISC  
WITH STAINLESS STEEL INSERT

## CHECK VALVE "VENTURI" NP 10-16

SIZE	CODE	DIS. N.	REV.
	VRV	1001	00